



Features:

- Compact small 4U chassis
- Supports Intel® 12th/13th Generation Core/Pentium/Celeron Desktop CPUs
- Installs standard ATX motherboards, supports standard 4U power supplies
- Supports up to 7 full-height card slots for expansion, meeting the application needs of various industries
- User-friendly design, with front-mounted system fans that require no tools for maintenance
- Carefully designed tool-free PCIe expansion card holder with enhanced shock resistance
- Standard configuration includes 2 3.5-inch shock and impact-resistant hard drive bays
- Front panel USB, power switch design, and power and storage status indicators for easier system maintenance



Remote Management



Status Monitoring



Remote Operations and Maintenance



Security Control






Product Specifications

Model	IPC350-Q670	
Processor System	CPU	Support Intel® 12/13th Generation Core / Pentium/ Celeron Desktop CPU
	TDP	125W
	Socket	LGA1700
	Chipset	Q670
	BIOS	AMI 256 Mbit SPI
Memory	Socket	4 * Non-ECC U-DIMM Slot, Dual Channel DDR4 up to 3200MHz
	Capacity	128GB, Single Max. 32GB
Graphics	Controller	Intel® UHD Graphics
Ethernet	Controller	1 * Intel i225-V/LM 2.5GbE LAN Chip (10/100/1000/2500 Mbps, RJ45) 1 * Intel i219-LM/V GbE LAN Chip (10/100/1000 Mbps, RJ45)
Storage	SATA	4 * SATA3.0 7P Connector, Support RAID 0, 1, 5, 10
	M.2	1 * M.2 Key-M (PCIe x4 Gen 4 + SATA3.0, NVMe/SATA SSD Auto Detect, 2242/2260/2280)
Expansion Slots	PCIe	2 * PCIe x16 slot (Gen 5, x16 /NA signal or Gen 4, x8 /x8 signal) 1 * PCIe x8 slot (Gen 4, x4 signal) 2 * PCIe x4 slot (Gen 4, x4 signal) 1 * PCIe x4 slot (Gen 3, x4 signal)
	PCI	1 * PCI slot
	Mini PCIe	1 * Mini PCIe (PCIe x1 Gen 3 + USB 2.0, with 1 * SIM Card)
	M.2	1 * M.2 Key-B (USB3.2 Gen 1x1 (co-lay with usb header, default), with 1 * SIM Card, 3042/3052)
Front I/O	Ethernet	2 * RJ45
	USB	4 * USB3.2 Gen 2x1 (Type-A) 4 * USB3.2 Gen 1x1 (Type-A)
	Display	1 * DP1.4: max resolution up to 3840*2160 @ 60Hz 1 * HDMI2.0: max resolution up to 3840*2160 @ 30Hz
	Audio	3 * 3.5mm Jack (Line-out + Line-in + MIC)
	Serial	2 * RS232/422/485 (COM1/2, DB9/M, Full Lanes, BIOS Switch)
Rear I/O	USB	2 * USB2.0 (Type-A)
	Button	1 * Power Button
	LED	1 * Power status LED 1 * Hard drive status LED
Internal I/O	USB	1 * USB3.2 Gen 1x1 (Vertical TYPE-A) 2 * USB2.0 (One of four shares a signal with the M.2 Key-B, optional, Header)
	COM	4 * RS232 (COM3/4/5/6, Header, Full Lanes)
	Display	1 * VGA: max resolution up to 1920*1200 @ 60Hz (wafer) 1 * eDP: max resolution up to 1920*1200 @ 60Hz (Header)
	Audio	1 * Front Audio (Line-Out + MIC, Header) 1 * Speaker (3W (per channel) into a 4Ω Loads, wafer)
	GPIO	1 * 16 bits DIO (8DI and 8DO, wafer)
	SATA	4 * SATA 7P Connector
	LPT	1 * LPT (Header)
	PS/2	1 * PS/2 (wafer)
	SMBus	1 * SMBus (wafer)
	FAN	2 * SYS FAN (Header) 1 * CPU FAN (Header)
Power Supply	Type	ATX
	Power Input Voltage	AC power supply, voltage and frequency shall be based on the ATX power supply provided
	RTC Battery	CR2032 Coin Cell
OS Support	Windows	Windows 10/11
	Linux	Linux
Watchdog	Output	System Reset
	Interval	Programmable 1 ~ 255 sec
Mechanical	Enclosure Material	SGCC
	Dimensions	330mm(L) * 350mm(W) * 180mm(H)
	Mounting	Wall mounted, Desktop
Environment	Heat Dissipation System	PWM fan cooling






Operating Temperature	0 ~ 50°C
Storage Temperature	-20 ~ 70°C
Relative Humidity	10 to 90% RH (non-condensing)

Product Dimensions

IPC350 立放

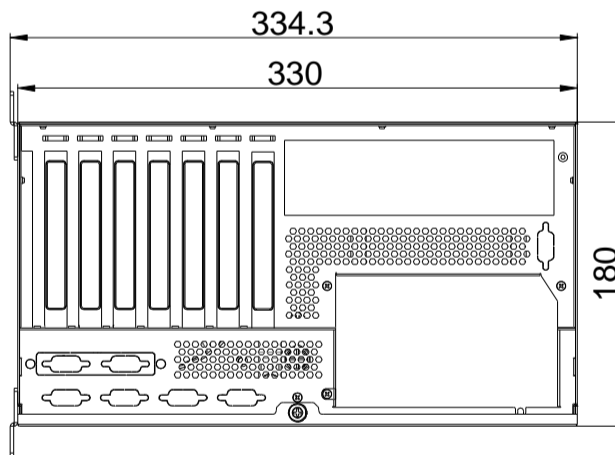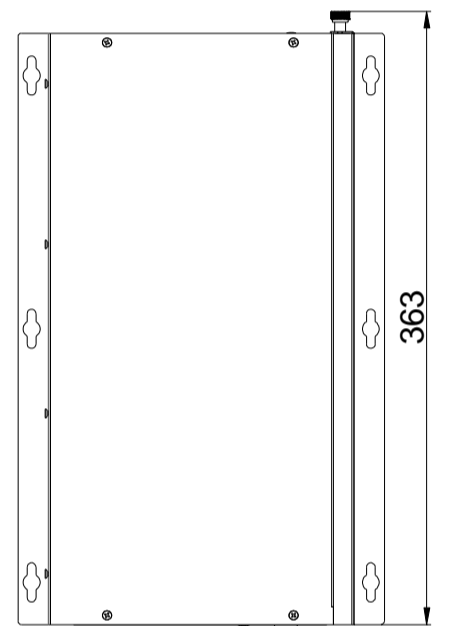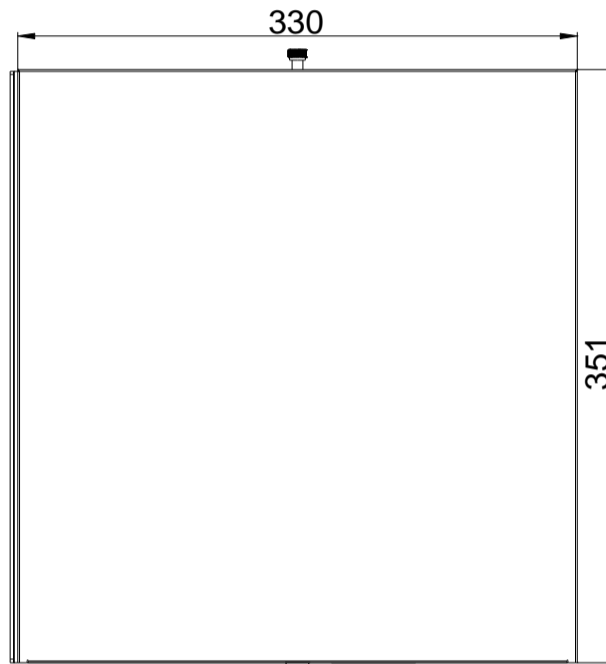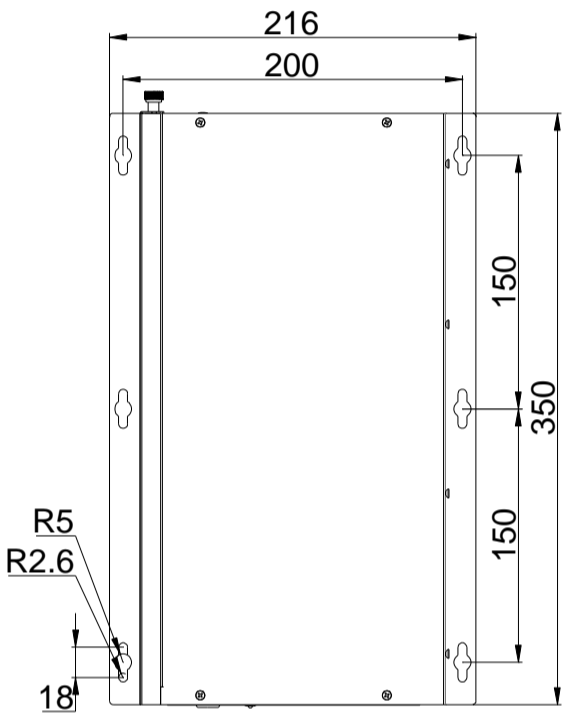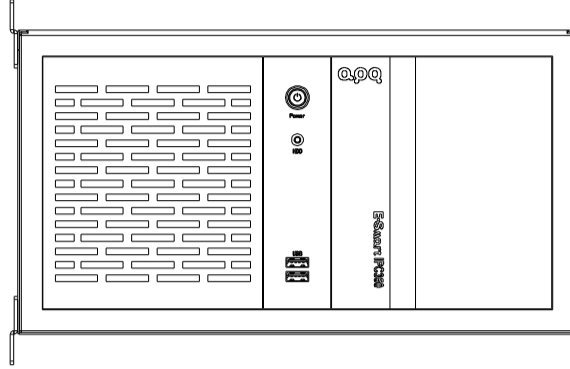

IPC350立放

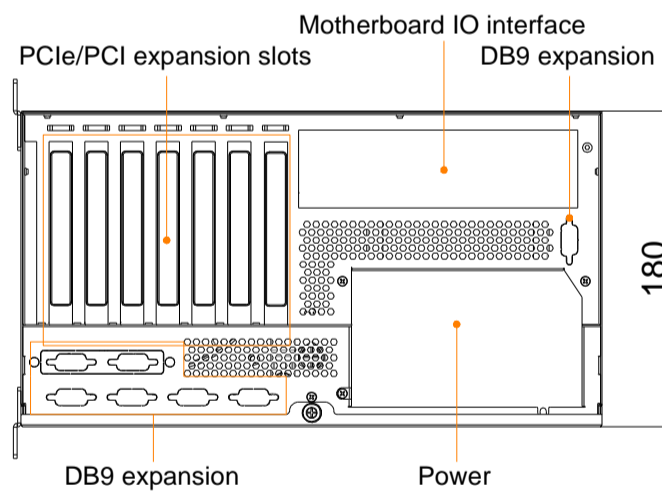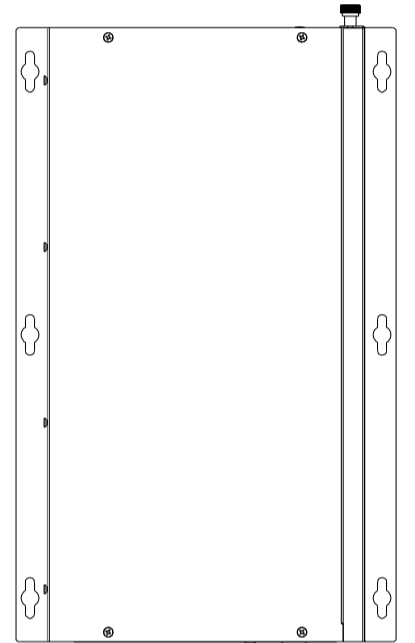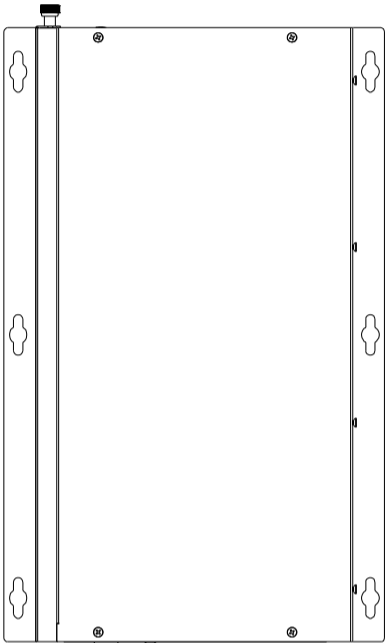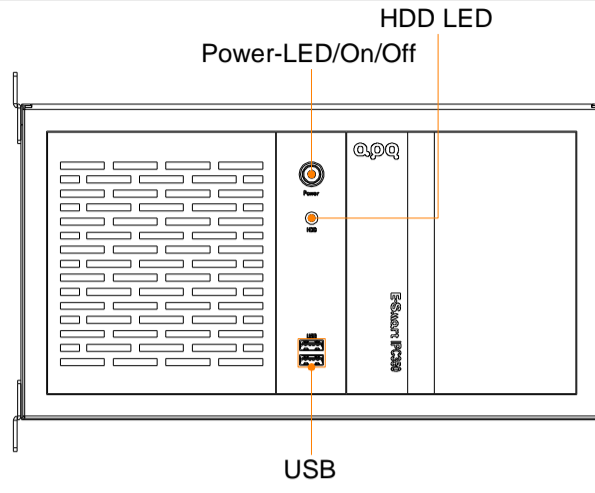

Motherboard Interface

