

特点:

- Intel® LGA1511 6~9th 处理器, 支持 Core™ i3/i5/i7, Pentium®及 Celeron®系列 TDP=65W
- 搭配 Intel® Q170 芯片组
- 2 个 Intel 千兆网络接口
- 2 个 DDR4 SO-DIMM 插槽, 最大支持 64G
- 4 个 DB9 串口 (COM1/2 支持 RS232/RS422/RS485)
- M.2 和 2.5 寸三硬盘位存储支持
- 3 路显示输出 VGA、DVI-D、DP, 最高支持 4K@60Hz 分辨率
- 4G/5G/WIFI/BT 无线功能扩展支持
- MXM、aDoor 模块扩展支持
- 可选 PCIe/PCI 标准扩展槽位支持
- DC18-62V 宽压输入, 额定功率可选 600/800/1000W



远程管理



状态监控



远程运维




安全控制

产品规格

Model		E7 Pro	
CPU	CPU	Intel® 6/7/8/9th Generation Core / Pentium/ Celeron Desktop CPU	
	TDP	65W	
	Socket	LGA1151	
	Chipset	Q170	
	BIOS	AMI UEFI BIOS (Support Watchdog Timer)	
Memory	Socket	2 * Non-ECC U-DIMM Slot, Dual Channel DDR4 up to 2133MHz	
	Max Capacity	64GB, Single Max. 32GB	
Graphics	Controller	Intel® HD Graphics	
Ethernet	Controller	1 * Intel i210-AT GbE LAN Chip (10/100/1000 Mbps) 1 * Intel i219-LM/V GbE LAN Chip (10/100/1000 Mbps)	
	Storage	SATA 3 * 2.5" SATA, Quick release hard disk bays (T≤7mm)), Support RAID 0, 1, 5 M.2 1 * M.2 Key-M (PCIe x4 Gen 3 + SATA3.0, NVMe/SATA SSD Auto Detect, 2242/2260/2280)	
Expansion Slots	PCIe Slot	Support PCIe module card(1*PCIe x 16+1*PCIe x4/1*PCIe x16+3*PCI/2*PCIe x8+2*PCI) PS:Expansion Card length limited 320mm,TDP limited 450W	
	aDoor/MXM	2* APQ MXM /aDoor Bus (Optional MXM 4 * LAN/4 * POE/6 * COM/16 * GPIO expansion card)	
	Mini PCIe	1 * Mini PCIe (PCIe2.0 x1 + USB 2.0, with 1*Nano SIM Card slot)	
	M.2	1 * M.2 Key-B (PCIe2.0 x1 + USB3.0, with 1 * SIM Card, 3042/3052)	
Front I/O	Ethernet	2 * RJ45	
	USB	6 * USB3.0 (Type-A, 5Gbps)	
	Display		1 * DVI-D: max resolution up to 1920*1200 @ 60Hz 1 * VGA (DB15/F): max resolution up to 1920*1200 @ 60Hz 1 * DP: max resolution up to 4096*2160 @ 60Hz
		Audio	2 * 3.5mm Jack (Line-Out + MIC)
		Serial	2 * RS232/422/485 (COM1/2, DB9/M, Full Lanes, BIOS Switch) 2 * RS232 (COM3/4, DB9/M)
	Button		1 * Power Button + Power LED 1 * System Reset Button (Hold down 0.2 to 1s to restart, and hold down 3s to clear CMOS)
		Rear I/O	Antenna 6 * Antenna hole
Internal I/O	USB	2 * USB2.0(wafer, Internal I/O)	
	LCD	1 * LVDS (wafer): max resolution up to 1920*1200 @ 60Hz	
	TFront Panel	1 * TFPANEL (3 * USB 2.0 + FPANEL, wafer)	
	Front Panel	1 * Front Panel (wafer)	
	Speaker	1 * Speaker (2-W (per channel)/8-Ω Loads, wafer)	
	Serial	2 * RS232 (COM5/6, wafer, 8x2pin, PHD2.0)	
	GPIO	1 * 16bit GPIO (wafer)	
	LPC	1 * LPC (wafer)	
	SATA	3 * SATA3.0 7P Connector	
	SATA Power	3 * SATA Power (SATA_PWR1/2/3, wafer)	
	SIM	2 * Nano SIM	
	FAN	2 * SYS FAN (wafer)	
Power Supply	Type	DC, AT/ATX	

	Power Input Voltage	18~62VDC, P=600/800/1000W
	Connector	1 * 3Pin Connector, P=10.16
	RTC Battery	CR2032 Coin Cell
OS Support	Windows	6/7th Core™: Windows 7/10/11 8/9th Core™: Windows 10/11
	Linux	Linux
Watchdog	Output	System Reset
	Interval	Programmable 1 ~ 255 sec
Mechanical	Enclosure Material	Radiator: Aluminium, Box: SGCC
	Dimensions	363mm(L) * 270mm(W) * 169mm(H)
	Weight	Net:10.48 kg, Total:11.38 kg(Include packaging)
	Mounting	VESA, Wallmount, Desk mounting
Environment	Heat Dissipation System	Fanless(CPU) 2*9cm PWM FAN(Internal)
	Operating Temperature	-20~60°C (SSD or M.2 Storage)
	Storage Temperature	-40~80°C
	Relative Humidity	5 to 95% RH (non-condensing)
	Vibration During Operation	With SSD: IEC 60068-2-64 (3Grms@5~500Hz, random, 1hr/axis)
	Shock During Operation	With SSD: IEC 60068-2-27 (30G, half sine, 11ms)
	Certification	CCC, CE/FCC, RoHS

产品尺寸

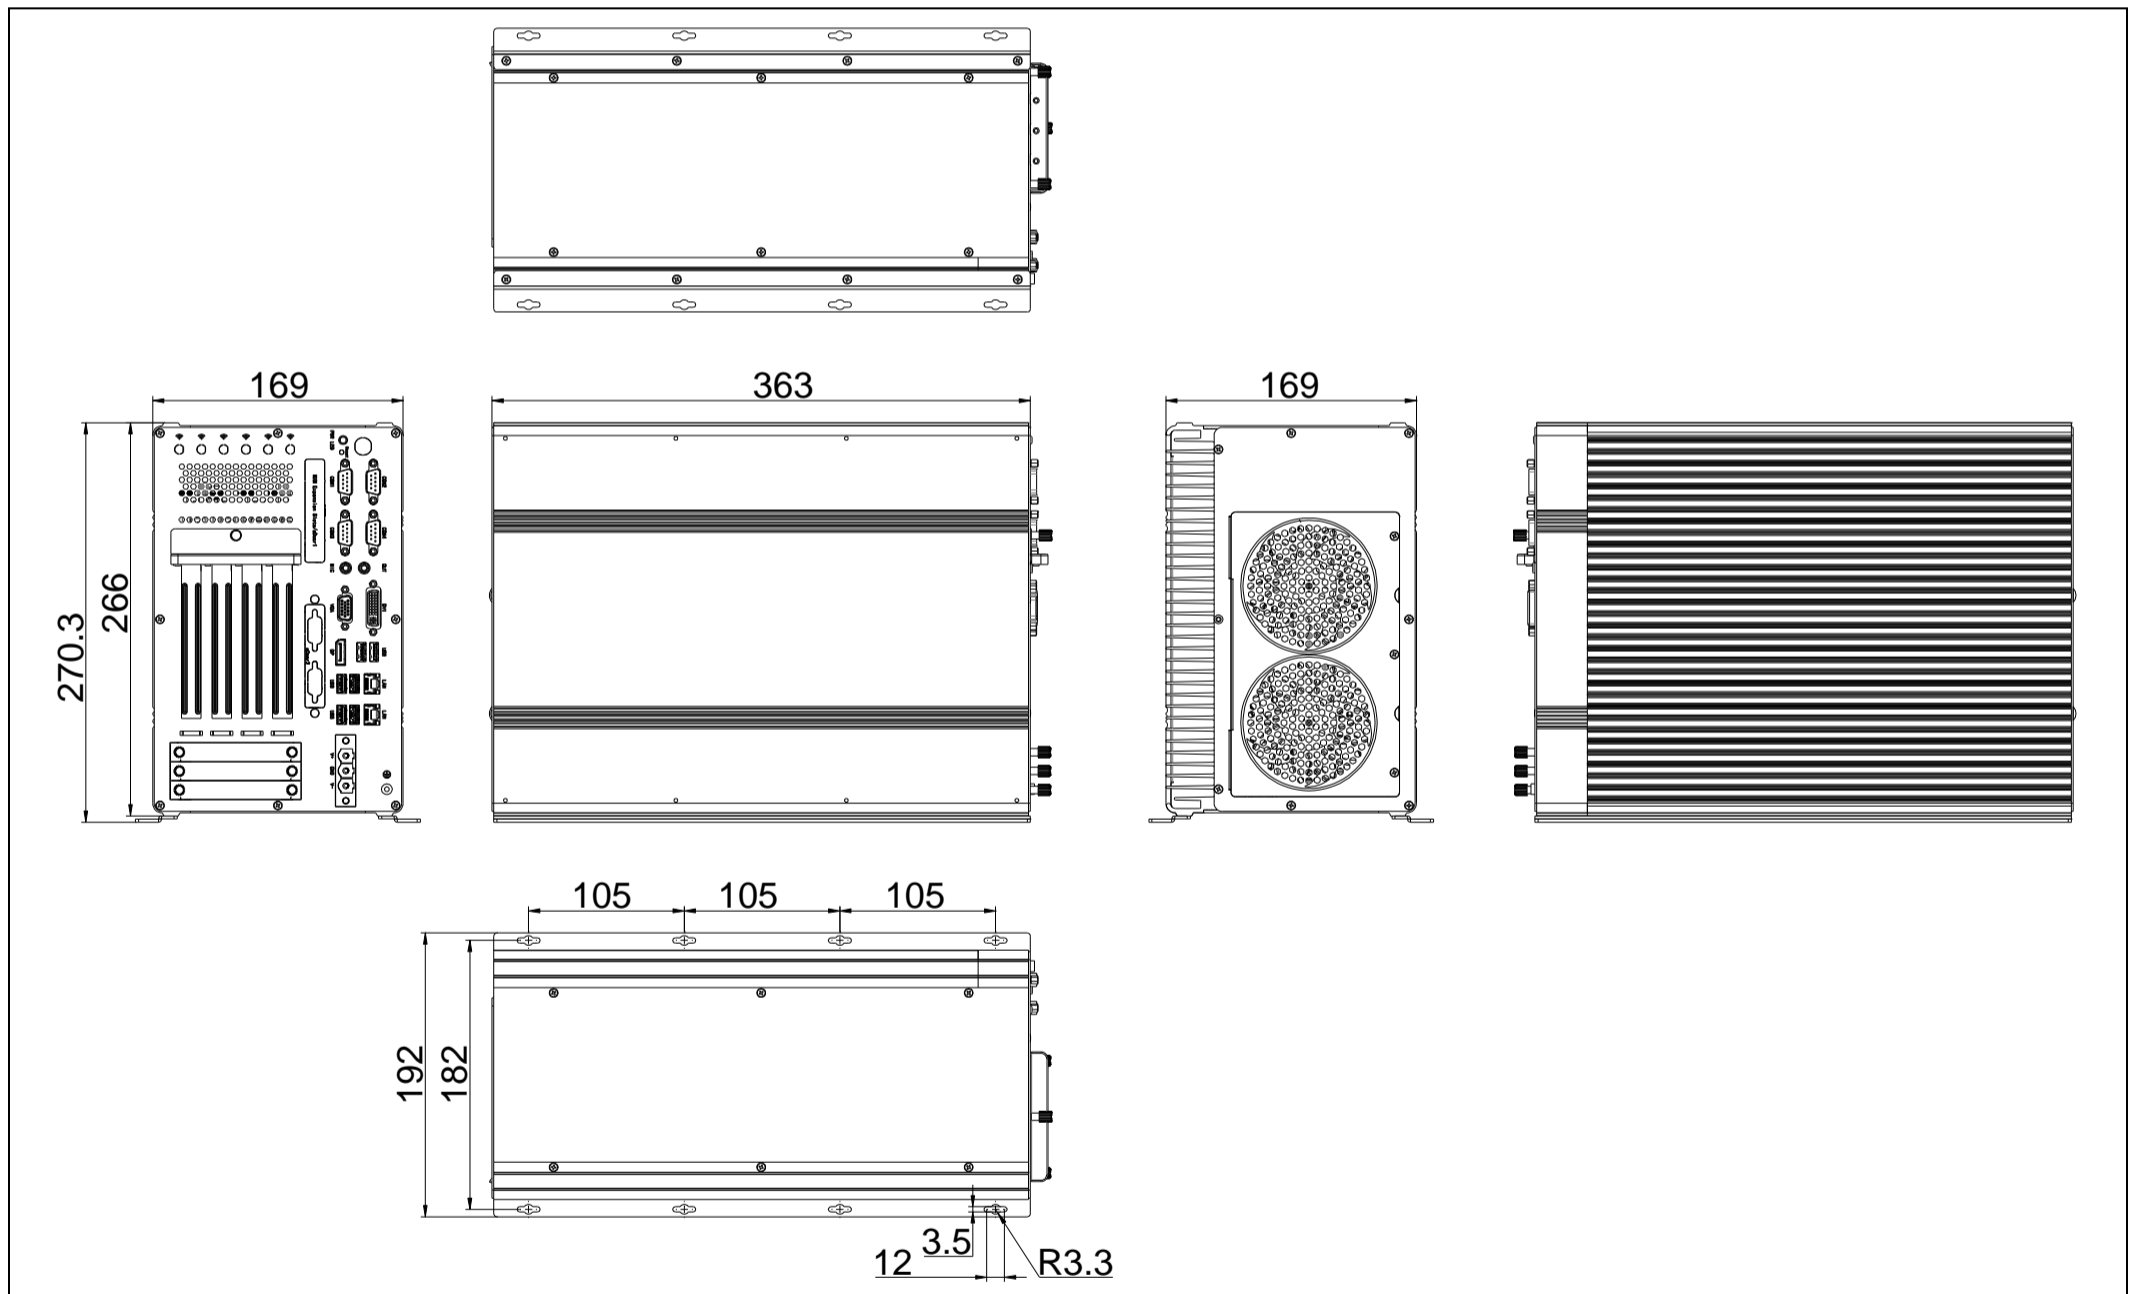

产品 I/O

